


Cable Assembly Parts Number Guide

PCTEL's Cable Assemblies use the following model to generate configured product codes. This structure outlines the electrical and mechanical specifications for each configured assembly.

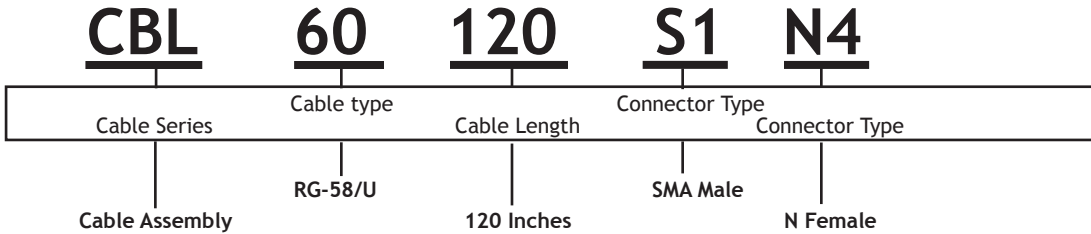

SERIES
CBL = Cable Assembly

CABLE TYPE
01 = LMR 100
02 = LMR 195
11 = Pro-Flex Plus 100
12 = Pro-Flex Plus 195
13 = Pro-Flex Plus 195A/U
14 = Pro-Flex Plus 195 (white)
20 = LMR240
30 = LMR400
31 = LMR400 Direct Burial
52 = RG-58A/U
53 = RG-142/U
54 = RG-174/U
55 = RG-213/U
60 = RG-58/U
61 = RG-58 Teflon (white)
62 = RG-316

CABLE LENGTH
Cable is available in length by inch. Longer cable will lead to higher potential loss.
** ex. 010 = 10 Inches
ex. 150 = 14 ft 6 in (150 in.)
ex. 300 = 25 ft. (300 in.)

CONNECTOR TYPE
B = BNC
N = N
F = FME
S = SMA
P = PL259
M = Mini-UHF
T = TNC
U = SMB
X = MCX
Z = MMCX

CONNECTOR TYPE
1 = Male
2 = Male reverse polarity
3 = Male right angle
4 = Female
5 = Female reverse polarity
6 = Female right angle
7 = Male soldered
8 = Female soldered

CONNECTOR COMPATIBILITY
Connectors are not necessarily compatible with every cable type. Please inquire to customer service as to what configurations and inventory are available.

**Product cable length will be within +/- 2 inches of order